

ScanBas

Receiver Unit

SRU-SB01

TECHNICAL SPECIFICATIONS

General requirements

According to the marine directive IEC60945

Electrical

Mains voltage: 90 to 264 VAC
 Mains frequency: 47-63 Hz
 Mains currents:
 230VAC: 0,5 A
 115VAC: 1,0 A
 Power consumption: 115 W

Temperature range

Operation: -15 to + 55 deg. C
 Storage: -15 to + 55 deg. C

Humidity

Operational: 30% to 80%
 Storage: 10% to 90%

Sensors

Max. no. of sensors: Receives all Scanmar sensors
 Number of channels:
 Total: 42
 Simultaneous: 26
 Boat codes
 (in use simultaneously) 7

Weight

Weight of cabinet: 10,4 kg

Compass safe distance

1,95 m

Main dimensions


Height: 225 mm
 Width: 178 mm
 Depth: 474 mm

Available options (accessories)


- One or two receiver boards (RX-boards)
- Trawl eye software

Approvals:

IEC 60945 3rd edition

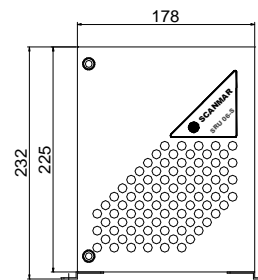

Front view

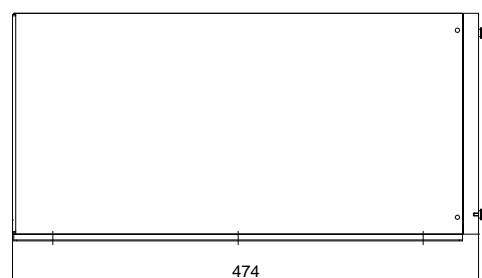

Side view

Revision no: 1.1	Product name: SRU-SB01	Document no. 105678
Revision date: 09.10.2003	Product part no: 105131	

Note: All specifications are subject to change without prior notice