

Symmetry Sensor

HC4-SY

TECHNICAL SPECIFICATIONS

Transmission

Frequency range: 38.9 – 43.4 kHz
 Source level: 190 dB // 1uPa @ 1m
 Beam width: 55 deg (-3dB)
 Range to vessel: Approx. 2500 m (Note 1)

Operation

Update rate across: Approx. 27 sec
 Max. depth: 1200 m

Battery

Type: NiCd, 2x12V / 600 mAh
 Charging time: 1.5 hour (QBC-05)
 Operation time: Approx. 55 hrs

Measurement

Across trawl path: 0 to +/- 3 knots
 Accuracy: ±- 10% of value
 (Min: ± 0.1 knots)

Weight

In air ex. Steel bracket: 8.3 kg
 In water ex. Steel bracket: 2.3 kg

Main dimensions

Length: 280 mm
 Width: 257 mm
 Height: 105 mm


Available accessories & spare parts

Mounting kit: 104742
 Battery pack: 105485 (2 pcs)
 Battery Charger: QBC-05

Approvals



Note 1: Depends on acoustic conditions, ships noise, mounting and alignment of sensors and hydrophone.

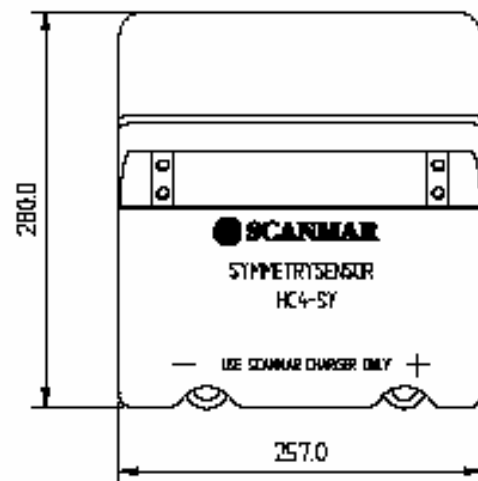

Revision no: 1.0	Product name: HC4-SY	Document no. 105774
Revision date: 09.10.2003	Product part no: 104732	

Note: All specifications are subject to change without prior notice